



## Advanced ferroelectric test System

### About the system

Advanced ferroelectric test system is designed and developed by our company and has recognition in the industry. The new system is digital and does not require an external computer or PC interface. Total operations are performed by a smart 7 inches touch panel and are fully automatic. The following tests can be performed with the system.

- PE loop at diff. frequencies
- PE fatigue measurement
- PE loop at diff. temperatures.
- Pyro-electric measurement
- Leakage Current Measurements

Optional Attachment for

- PE loop under magnetic field




### About Us

Marine India is a Professional company, working in design development and production of material research systems for the welfare of Indian Scientific Natured Groups. The main thrust of our company is to produce highly advanced adaptable and low cost systems to suit both Indian and Foreign research facilities.

### Main Product Line

- PE loop tracer system
- BH loop tracer systems
- Multi Ferroic Test system
- Resistance measurement systems
- Electromagnets
- DC polling unit
- AC/DC power supplies
- Source Measure Unit
- LCR Meter/Impedance analyzers interfacing, software's
- 

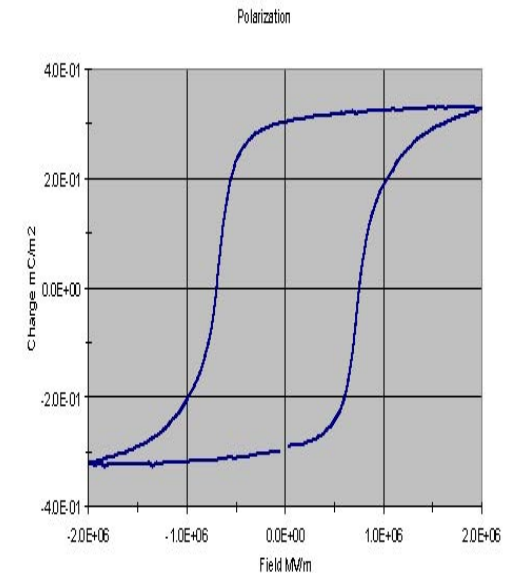

## **MARINE INDIA**

A3/25B Green Apartment

Near Jawla Heri Mrkt,

Paschim Vihar

New Delhi - 110063,


INDIA

Email: [sales@marineindia.com](mailto:sales@marineindia.com)

[www.marineindia.com](http://www.marineindia.com)

Ph +91 11 41428187

*Application Oriented Basic  
Science Group*

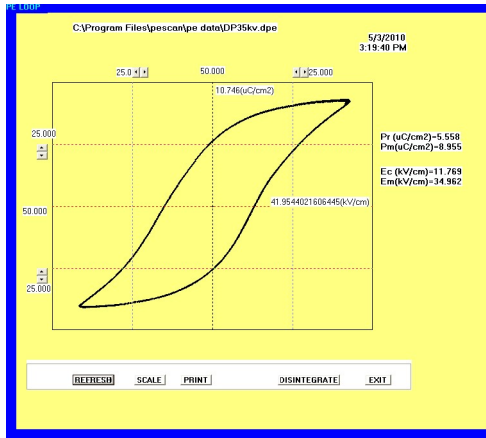

## General Specifications


- Field 10 KV
- Frequency 1 Hz to 1 MHz
- Fatigue up to 20<sup>th</sup> order of cycles
- Resolution 18 bit
- Temperature RT- 400 degree with PID control
- Furnace and sample holder for bulk samples and thin film
- Complete data transfer to standard software like Origin xls.
- Full touch screen operation using smart 7 Inches touch panel mounted on the unit
- Data transfer using USB stick
- LAN port for multiple connectivity and remote maintenance
- Absolutely no PCI/USB/ISA/RS232 interface required
- 19 inches rack mountable unit
- Silicon oil 500ml
- In built temperature interface for K type thermocouple
- 

## List of deliverables

- Main PE unit
- Teflon sample holder
- Heating stage with temperature controller
- High voltage leads
- Standard PZT sample
- Inter connecting cables and manual
- Ferroelectric test software

## System test specifications

- Electric Field 100KV/cm for 1 mm thick samples
- 16 Bit Wave form generator
- 18 Bit AD convertor
- Minimum charge sensitivity of bulk 1fC
- Maximum charge measurement 100  $\mu\text{C}$
- Minimum sample area 1 sq mm
- Maximum Sample diameter 10 – 15 mm
- Maximum Sample thickness 3 mm

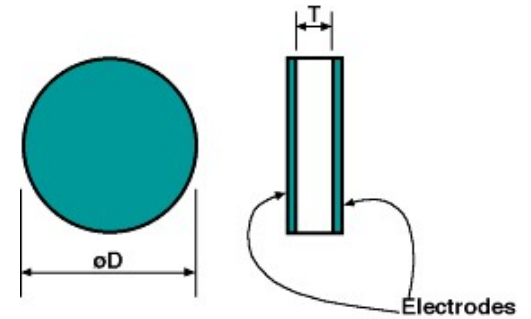

## References

- Solid State Lab (SSPL) Delhi
- IIT Mandi
- Indian Institute of Science Bangalore
- CAT Indore
- IIT Delhi
- Rajkot Saurashtra University
- IIT Roorkee
- Shimla university
- Cat indore
- IIT Chennai
- Delhi University
- IASC Calcutta
- DMRL Hyderabad
- Osmania Univeristy

The full list is very exhaustive but above is only few major references.